

**For Non-Health Hazard Applications**

Job Name \_\_\_\_\_ Contractor \_\_\_\_\_  
 Job Location \_\_\_\_\_ Approval \_\_\_\_\_  
 Engineer \_\_\_\_\_ Contractor's P.O. No. \_\_\_\_\_  
 Approval \_\_\_\_\_ Representative \_\_\_\_\_

**LEAD FREE\***

# HydroGuard® Master Tempering Valve Supply Fixture

## Series LFLM490 Top Inlets/Top Outlet — Semi-Recessed Cabinet



**Features**

- Features Lead Free\* construction to comply with Lead Free\* installation requirements.
- Paraffin-based advanced thermal actuation technology to sense and adjust outlet temperature
- Dirt and lime resistant poppet and seat design
- Virtual shutoff if supply pressure fails
- Stainless steel or white painted cabinets
- Factory tested valve and piping
- Triple-duty checkstops with filters, dial-thermometer, ball valve
- Rough bronze and chrome finishes



Advanced Thermal Activation

**Specifications**

Connections . . . . . ½" (15mm) inlets and outlet  
 Maximum Hot Water Supply Temperature . . . . . 200°F (93°C)  
 Minimum Hot Water Supply Temperature . . . . . 5°F (3°C) above set point  
 Minimum Flow\*\* . . . . . 0.5 gpm (1.9 lpm)  
 Maximum Operating Pressure . . . . . 150 psi (1034 kPa)  
 Temperature Adjustment Range . . . . . 90 – 160°F (32 – 71°C)  
 Listing/Compliance (Valve Only) . . . . . ASSE 1017, CSA B125

\* The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.


\*\* When tested in accordance with ASSE 1017

**Capacity**

Flow Capacity at 50-50 Mixed Ratio							
		Pressure Differential					
Valve	Cv	5 psi	10 psi	20 psi	30 psi	45 psi	60 psi
		(35 kPa)	(69 kPa)	(138 kPa)	(207 kPa)	(310 kPa)	(414 kPa)
LFLM490	3.42	7.6 gpm	11.0 gpm	15.0 gpm	19.0 gpm	23.0 gpm	27.0 gpm
		(29 lpm)	(42 lpm)	(57 lpm)	(72 lpm)	(87 lpm)	(102 lpm)

Powers product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Powers Technical Service. Powers reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Powers products previously or subsequently sold.

## Dimensions

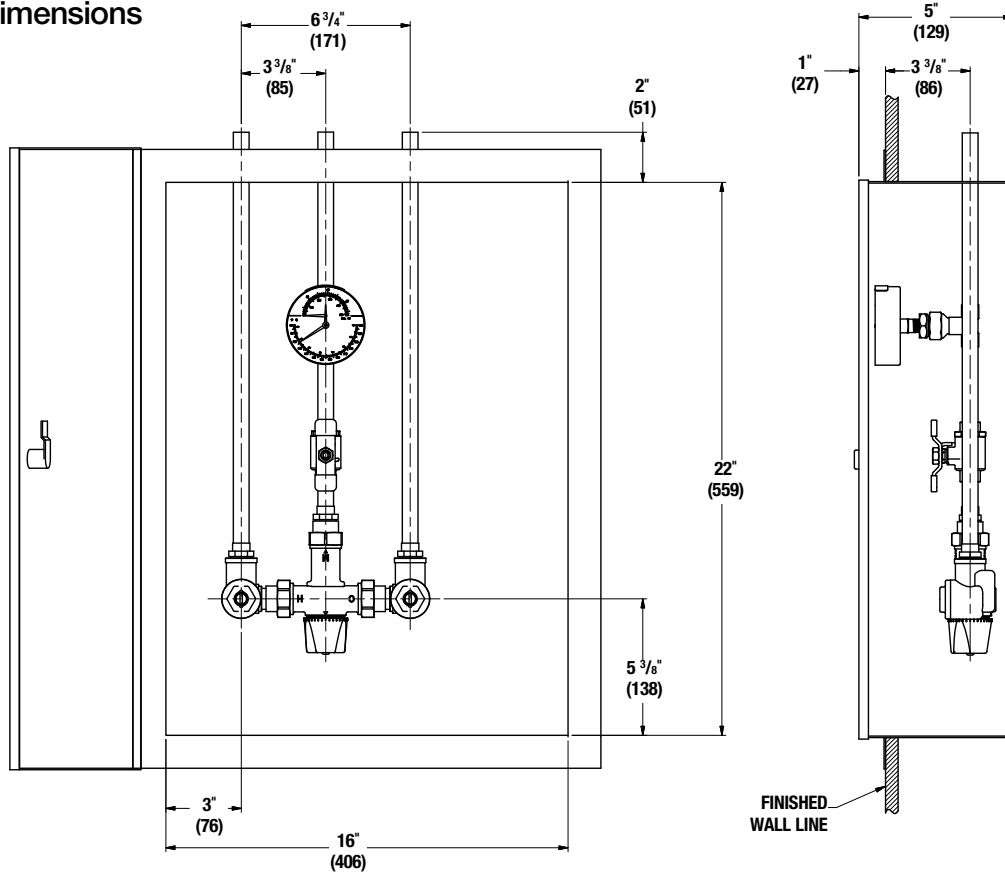

Note:  
Dimensions are shown  $\pm 1/2"$   
Dimensions in parentheses  
are in mm

## Ordering Information

L F L M 4 9 0    D    S

### Valve Order Code

23 gpm (87 lpm)

LFLM490

### Finish

Rough Bronze  
Chrome Plated

A  
C

### Piping Inlets/Outlet

Top/Top

D

### Cabinet Style

Stainless steel, Semi-Recessed  
Painted, Semi-Recessed

P  
T

### View Port

None  
Window

### Order Code

0  
W

### Alarm System

None  
Aqua Sentry® 2 Alarm

0  
4

### Option

None  
Cold Water Bypass  
T/P Gauge on Inlets  
C/W Bypass & T/P Gauge on Inlets

0  
2  
4  
6

### Temperature Range

Standard 90° – 160°F (32° – 71°C) S

## Typical Specification

Cabinet Supply Fixture (CSF) shall be factory assembled and tested and include a stainless steel or painted steel cabinet. CSF shall feature a HydroGuard® LFLM490 Series Master-Tempering Valve with advanced paraffin-based actuation technology. The valves shall be constructed using Lead Free\* brass. Lead Free\* brass valves shall comply with state codes and standards, where applicable, requiring reduced lead content. CSF shall also include copper piping, ball valve(s) and temperature/pressure gauge for diagnostics. The tempering valve shall have union checkstops, an outlet temperature range of 90 – 160°F (32 – 71°C) (with lockable means), and an approach temperature of 5°F (3°C). Valve shall be ASSE 1017 listed and CSA certified. Minimum flow to ASSE 1017 shall be 0.5 gpm (1.9 lpm).

Valve shall be a Powers model \_\_\_\_\_. All alternatives must have written approval prior to bidding.

# POWERS™

A WATTS Brand

USA: Tel: (800) 669-5430 • Fax: (847) 229-0526 • PowersControls.com  
Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • PowersControls.ca  
Latin America: Tel: (52) 81-1001-8600 • PowersControls.com