




FD-100-M

Tag: _____

Floor Drain with Square Strainer

SPECIFICATION: Watts Drainage FD-100-M epoxy coated cast iron floor drain with anchor flange, reversible clamping collar with primary & secondary weepholes, adjustable square heel proof nickel bronze strainer, and no hub (standard) outlet.

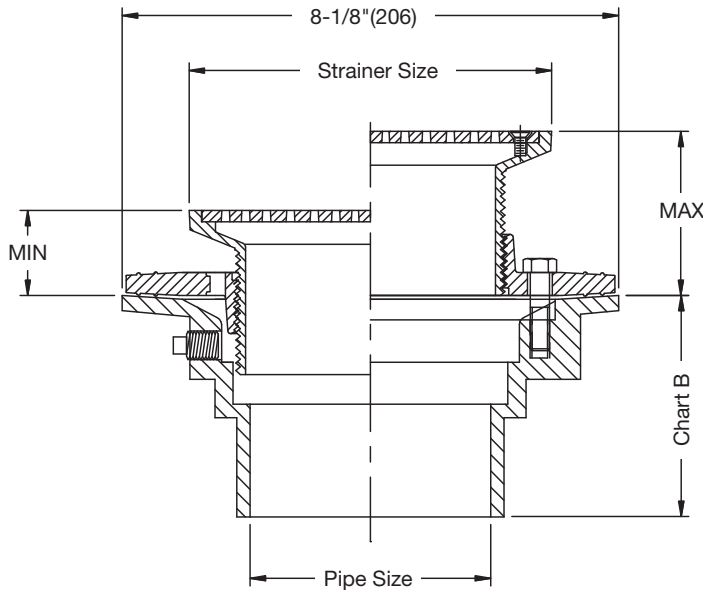

Strainer Size

Str. Dia	Min.	Max.	Load Rating	Free Area Sq. In.
5x5" (127x127)	7/8" (22)	3-1/4" (83)	*MD	9
6"x6" (152x152)	1" (25)	3-1/4" (83)	*MD	12
8"x8" (203x203)	1-3/8" (35)	3-5/8" (92)	*MD	26

NOTICE

The load classifications are in accordance with the American National Standards ASME A112.21.1M
 ASME Ratings are as follows:
 XHD - Safe Live Load 7500-10,000 lbs.(3402-4536 kg)
 The above categories are given as a guide only.
 Please consult factory.

Chart B

	Std.	P	T	X	60/61
Pipe No	Push On	Female Thread	Inside Caulk	PVC/ABS	
2"(51)	3-5/8"(92)	4-1/4"(108)	4-1/4"(108)	4-1/2"(114)	4"(102)
3"(76)	3-5/8"(92)	4-1/4"(108)	4-1/4"(108)	4-1/2"(114)	4"(102)
4"(102)	3-5/8"(92)	4-1/4"(108)	4-1/4"(108)	4-1/2"(114)	4"(102)
6"(152)	3-1/2"(89)				

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product

Components



Suffix	Pipe Sizing (Select One) Description	
2	2"(51) Pipe Size	<input type="checkbox"/>
3	3"(76) Pipe Size	<input type="checkbox"/>
4	4"(102) Pipe Size	<input type="checkbox"/>
6	6"(152) Pipe Size	<input type="checkbox"/>

Suffix	Outlet Type (Select One) Description	
NH	No Hub (MJ)	<input type="checkbox"/>
P	Push On	<input type="checkbox"/>
T	Threaded Outlet	<input type="checkbox"/>
X	Inside Caulk	<input type="checkbox"/>

Suffix	Strainer (Select One) Description	
M5	5"x5" Nickel Bronze	<input type="checkbox"/>
M6	6"x6" Nickel Bronze	<input type="checkbox"/>
M8	8"x8" Nickel Bronze	<input type="checkbox"/>

Suffix	Options (Select One or More) Description	
-5	Sediment Bucket	<input type="checkbox"/>
-6	Vandal Proof	<input type="checkbox"/>
-7	Trap Primer Tapping	<input type="checkbox"/>
-8	Backwater Valve (2", 3", 4" Only)	<input type="checkbox"/>
-9	Hinged Grate (For 6", 8" Strainer Only)	<input type="checkbox"/>
-13	Galvanized Body	<input type="checkbox"/>
-15	Strainer Extension (DD-50)	<input type="checkbox"/>
-F4-50	4" Round Cast Iron Funnel	<input type="checkbox"/>
-F4-1	4" Round Nickel Bronze Funnel	<input type="checkbox"/>
-F6-1	6" Round Nickel Bronze Funnel	<input type="checkbox"/>
-G-50	4x9" Oval Cast Iron Funnel	<input type="checkbox"/>
-G-1	4x9" Oval Nickel Bronze Funnel	<input type="checkbox"/>
-SO	Side Outlet	<input type="checkbox"/>
-US	Buy American Compliant	<input type="checkbox"/>

Suffix	Optional Body Material (Select One) Description	
-60	PVC Body w/Socket Outlet	<input type="checkbox"/>
-61	ABS Body w/Socket Outlet	<input type="checkbox"/>

Job Name _____
 Job Location _____
 Engineer _____

Contractor _____
 Contractor's P.O. No. _____
 Representative _____

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

USA: Tel: (800) 338-2581 • Fax: (828) 248-3929 • Watts.com
Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca
Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com

