


FD-1100-B

Tag:

Floor Drain with Round Heavy Duty Stainless Steel Strainer

SPECIFICATION: Watts Drainage FD-1100-B epoxy coated cast iron floor drain with anchor flange, reversible clamping collar with primary and secondary weepholes, adjustable heavy duty round heel proof stainless steel strainer, and no hub (standard) outlet.

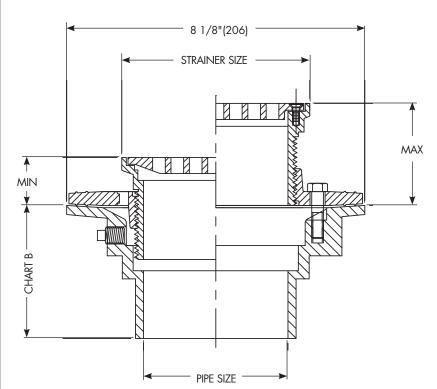

Strainer Size


Str. Dia	Min	Max	Load Rating	Free Area Sq In
5"(127)	13/16"(21)	2-1/2"(64)	*XHD	8
6"(152)	7/8"(22)	2-3/4"(70)	*XHD	9
8"(203)	7/8"(22)	3-1/4"(83)	*XHD	18

* The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows: XHD - Safe Live Load 7500-10000 lbs.

(3375-4500kg) The above catagories are given as the guide only. Please consult factory.

Chart B

	Std.	P	T	Х	60/1
Pipe Size	No Min	Push Max	Female Load	Inside Caulk	PVC/ ABS
2"(51) 3"(76) 4"(102) 6"(152)	3-5/8"(92) 3-5/8"(92) 3-5/8"(92) 3-1/2"(89)	4-1/4"(108) 4-1/4"(108) 4-1/4"(108)	4-1/4"(108) 4-1/4"(108) 4-1/4"(108)	4-1/2"(114) 4-1/2"(114) 4-1/2"(114)	4"(102) 4"(102) 4"(102)



Pipe Sizing (Select One)			
Suffix	Description		
2	2"(51) Pipe Size		
3	3"(76) Pipe Size		
4	4"(102) Pipe Size		
6	6"(152) Pipe Size (NH Only)		

Outlet Type (Select One)			
Suffix	Description		
NH	No Hub (MI)		
Р	Push On		
T	Threaded Outlet		

Х	Inside Caulk	(L
	Strainer	(Select One)	
ctt:	Decembrish		

B5 51/8"(130) Diameter, Stainless Steel B6 6"(152) Diameter, Stainless Steel B8 8"(203) Diameter, Stainless Steel

Options (Select One or More) Suffix Description Sediment Bucket Vandal Proof -6 Trap Primer Tapping -8 Backwater Valve (2,3,4" Only) Galvanized Body -13 -15 Strainer Extension (DD-50) 304SS Body and Collar -F4-50 4" Round Cast Iron Funnel -F4-1 4" Round Nickel Bronze Funnel -F4-3 4" Round SS Funnel -F6-1 6" Round Nickel Bronze Funnel -G-50 4x9" Oval Cast Iron Funnel -G-1 4x9" Oval Nickel Bronze Funnel -G-3 4x9" Oval SS Funnel

Optional Body Material		
Suffix	Description	
-60	PVC Body w/Socket Outlet	
-61	ABS Body w/Socket Outlet	

Buy American Compliant

Side Outlet

-SO

Job Name	Contractor
Job Location	Contractor's P.O. No.
Engineer	Representative

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



USA: 100 Watts Road, Spindale, NC, 28160-2298; TEL: 828-288-2179 TOLL-FREE: 1-800-338-2581 www.watts.com

ES-WD-FD-1100-B 1344 FD-1100-B