


FD-450-F

Area Drain with 15"x15" Fixed Top

SPECIFICATION: Watts Drainage FD-450-F epoxy coated cast iron area drain with anchor flange, weepholes, 15-5/8"x15-5/8"(397x397) square fixed top with heel proof ductile iron grate, and no hub (standard) outlet.

Tag:

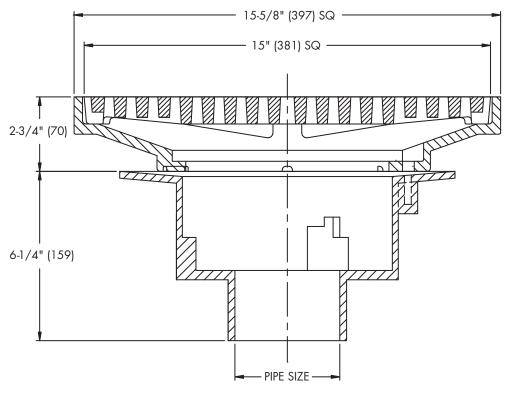

Components FD-450-F

Pine Sizing (Select One)

i ipe sizing (select one)				
Suffix	Description			
2	2"(51) Pipe Size			
3	3"(76) Pipe Size			
4	4"(102) Pipe Size			
5	5"(152) Pipe Size (NH Only)			
6	6"(152) Pipe Size			

П

Outlet Type (Select One) Suffix Description No Hub (MJ) NH Push On Threaded Outlet Inside Caulk

8"(203) Pipe Size (NH Only)

Options (Select One or More)				
Suffix	Description			
-1	Nickel Bronze Top			
-5	Sediment Bucket			
-6	Vandal Proof			
-7	Trap Primer Tapping			
-8	Backwater Valve (2, 3, 4" Only)			
-9	Hinged Grate			
-13	All Galvanized			
-21	Secondary Strainer			
-34	Closure Plug			
-F4-50	4" Round Cast Iron Funnel			
-F4-1	4" Round Nickel Bronze Funnel			
-F6-1	6" Round Nickel Bronze Funnel			
-G-50	4"x9" Oval Cast Iron Funnel			
-G-1	4"x9" Oval Nickel Bronze Funnel			
-SB	Shallow Body 2-3/4"Deep			
	(3", 4", 6" NH/P, 8" NH)			
-SO	Side Outlet (2, 3, 4" Only)			
-US	Buy American Compliant			

Optional Body Material					
Suffix	Description				
-60	PVC Body (2, 3, 4, 6" Only)				
-61	ABS Body (2, 3, 4" Only)				

NOTICE

Load Rating & Free Area

Load	Free Area
Rating	Sq. In.
*XHD	57

The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows: XHD - Safe Live Load 7500-10000 lbs.(3375-4500kg) The above categories are given as a guide only. Please consult factory.

Job Name	Contractor
Job Location	Contractor's P.O. No.
Engineer	Representative

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

A Watts Water Technologies Company

USA: Tel: (800) 338-2581 • Fax: (828) 248-3929 • Watts.com Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca

Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com