


SPECIFICATION: Watts Drainage Products FD-460-F-9-46 powder epoxy coated rectangular floor drain with hinged square epoxy coated heavy duty ductile iron grate, anchor flange integral trap with cleanout and no hub (MJ) (standard) side outlet.

Order Code: FD-46 ☐ -F-9-46- ☐ - ☐

Ex. FD-462-F-9-46-1

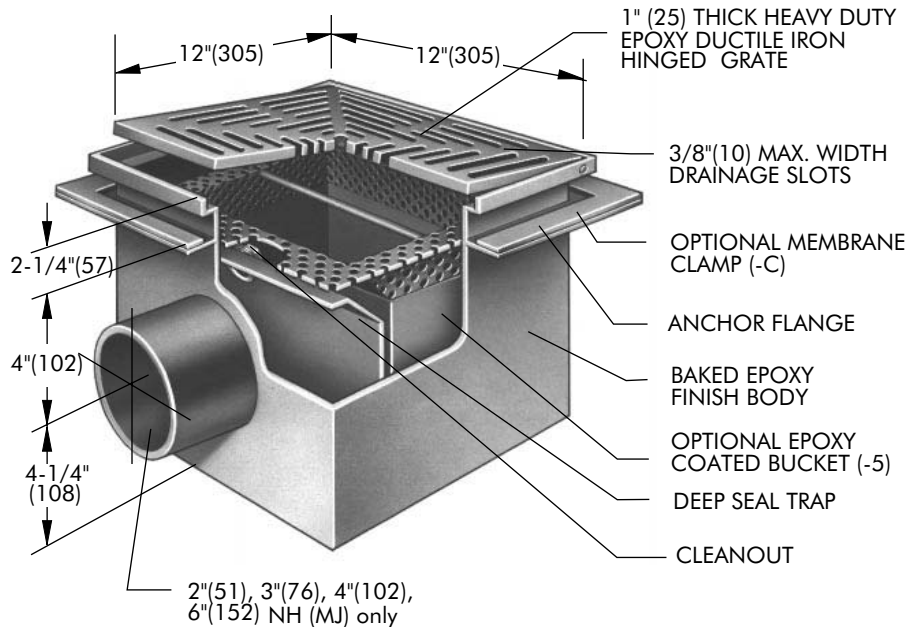

Pipe Sizing (Select One)		
Suffix	Description	
2	2"(51) Pipe Size	<input type="checkbox"/>
3	3"(76) Pipe Size	<input type="checkbox"/>
4	4"(102) Pipe Size	<input type="checkbox"/>
6	6"(152) Pipe Size	<input type="checkbox"/>

Grate		
Suffix	Description	
-1	Nickel Bronze Veneer	<input type="checkbox"/>
-3	Stainless Steel Veneer	<input type="checkbox"/>
-4	Ductile Iron	<input type="checkbox"/>

Options (Select One or More)		
Suffix	Description	
-C	Membrane Clamp	<input type="checkbox"/>
X	Special Dimension, per inch	<input type="checkbox"/>
-3	Stainless Steel Trap	<input type="checkbox"/>
-5	Sediment Bucket	<input type="checkbox"/>
-6	Vandal Proof	<input type="checkbox"/>
-12	Galvanized Top	<input type="checkbox"/>
-13	Galvanized Body	<input type="checkbox"/>
-19	Deflector Grate	<input type="checkbox"/>
-26	Hinged Locking Grate	<input type="checkbox"/>
-28	All SS Body, EHD Fabricated SS Grate	<input type="checkbox"/>
-113M	Special Epoxy from 3M Range	<input type="checkbox"/>

Load Rating & Free Area

Suffix	Load Rating	Free Area Sq. In.
F-9-46	*XHD	41

* The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows:
XHD - Safe Live Load 7500-10000 lbs.(3375-4500kg)
The above categories are given as a guide only.
Please consult factory.

Job Name _____ Contractor _____

Job Location _____ Contractor's P.O. No. _____

Engineer _____ Representative _____

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.