


SPECIFICATION: Watts Drainage Products FD-520 epoxy coated side outlet floor drain with epoxy coated fabricated steel body and extra heavy duty 12"x24"(305x610) two section ductile iron grate.

Order Code: FD-52 - 4 -

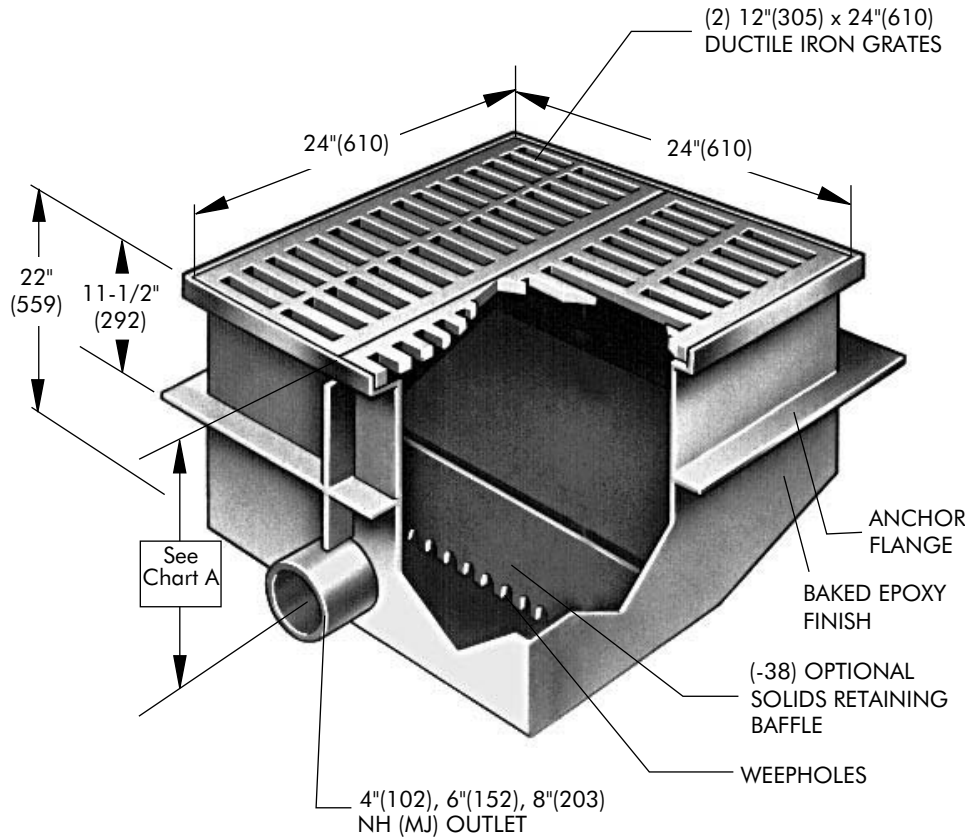

Ex. FD-524-4-C

Pipe Sizing (Select One)	
Suffix	Description
4	4"(102) Pipe Size <input type="checkbox"/>
6	6"(152) Pipe Size <input type="checkbox"/>
8	8"(203) Pipe Size <input type="checkbox"/>

Options (Select One or More)	
Suffix	Description
-C	Membrane Clamp <input type="checkbox"/>
-5	Sediment Bucket <input type="checkbox"/>
-6	Vandal Proof Grate <input type="checkbox"/>
-10	Secured Top /w Phillips Screws <input type="checkbox"/>
-12	Galvanized Top <input type="checkbox"/>
-13	All Galvanized <input type="checkbox"/>
-28	All 304 Stainless Steel (CF9) <input type="checkbox"/>
-38	Solid Retaining Baffle <input type="checkbox"/>
-T	Threaded Outlet <input type="checkbox"/>

Chart A

Outlet Size	Top to Center of Outlet
4"(102)	16-1/2"(419)
6"(152)	16-1/2"(419)
8"(203)	11-1/2"(192)

Load Rating & Free Area

Load Rating	Free Area Sq. In.
*XHD	208

* The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows:
 XHD - Safe Live Load 7500-10000 lbs.(3375-4500kg)
 The above categories are given as a guide only.
 Please consult factory.

Job Name _____ Contractor _____

Job Location _____ Contractor's P.O. No. _____

Engineer _____ Representative _____

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.