




FD-530

Tag: \_\_\_\_\_

### Large Capacity Offset Parking Area Drain

**SPECIFICATION:** Watts Drainage FD-530 epoxy coated offset parking area drain with fabricated steel body, extra heavy duty 24-1/2"x24-1/2" (622x622) two-section ductile iron grate, and no hub (standard) outlet.

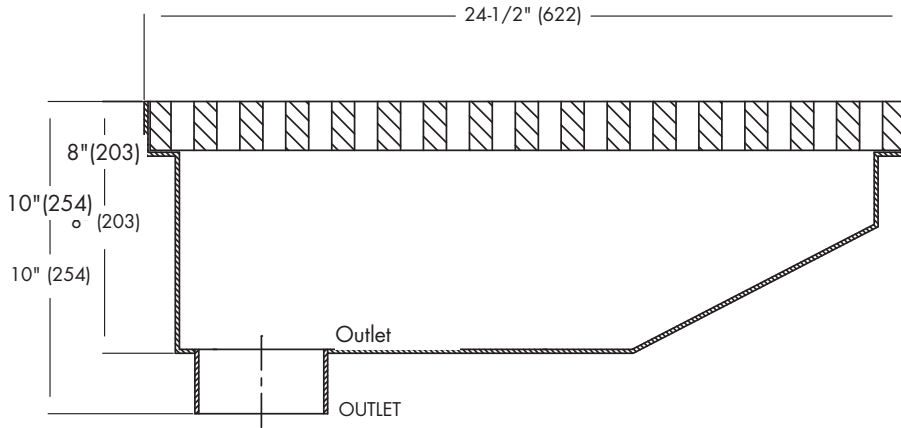

Suffix	Pipe Sizing (Select One) Description	
3	3" (76) Pipe Size	<input type="checkbox"/>
4	4" (102) Pipe Size	<input type="checkbox"/>
6	6" (152) Pipe Size	<input type="checkbox"/>
8	8" (203) Pipe Size	<input type="checkbox"/>
10	10" (254) Pipe Size	<input type="checkbox"/>

Suffix	Options (Select One) Description	
-C	Membrane Clamp	<input type="checkbox"/>
-T	Threaded Outlet	<input type="checkbox"/>
-5	Sediment Bucket	<input type="checkbox"/>
-6	Vandal Proof	<input type="checkbox"/>
-38	Solid Retaining Baffle	<input type="checkbox"/>
-US	Buy American Compliant	<input type="checkbox"/>

**NOTICE**

The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows:  
 XHD - Safe Live Load 7500-10,000 lbs.(3402-4536 kg)  
 The above categories are given as a guide only.  
 Please consult factory.

**NOTICE**

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product

<b>Load Rating</b>	<b>Free Area Sq. In.</b>
<b>*XHD</b>	<b>208</b>

Job Name \_\_\_\_\_  
 Job Location \_\_\_\_\_  
 Engineer \_\_\_\_\_

Contractor \_\_\_\_\_  
 Contractor's P.O. No. \_\_\_\_\_  
 Representative \_\_\_\_\_

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

**USA:** Tel: (800) 338-2581 • Fax: (828) 248-3929 • Watts.com  
**Canada:** Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca  
**Latin America:** Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com



A Watts Water Technologies Company