


FD-670

## All PVC Area Drain w/10" Round Fixed Top

**SPECIFICATION:** Watts Drainage Products FD-670 PVC area drain with anchor flange, weepholes, 10-1/8" diameter fixed top, heel proof PVC grate secured with vandal proof stainless steel screws, and socket outlet.

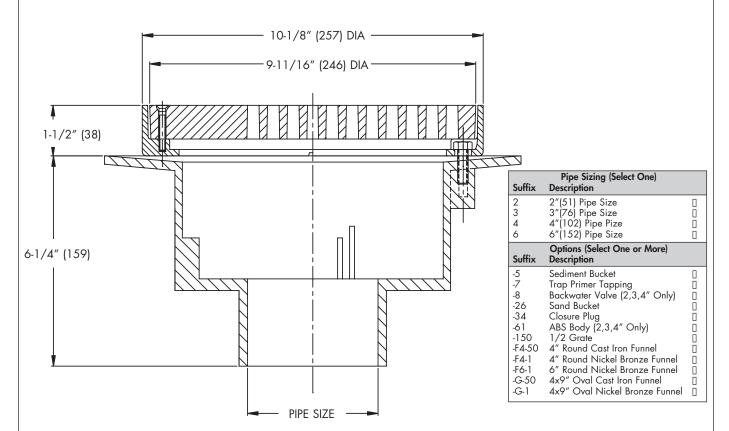

## Chart A

	Std.	Р	T	Х	60/61
Pipe Size	No Hub	Push On	Female Thread	Inside Caulk	PVC/ ABS
2"(51) 3"(76) 4"(102) 6"(152)	3-5/8"(92) 3-5/8"(92) 3-5/8"(92) 3-1/2"(89)	4-1/4"(108) 4-1/4"(108) 4-1/4"(108)	4-1/4"(108) 4-1/4"(108) 4-1/4"(108)	4-1/2"(114)	4"(102) 4"(102) 4"(102)

## Load Rating & Free Area

Load Rating	Free Area Sq. In.			
*LD	27			

\* The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows: ID - Safe Live Load Under 2000 lbs (200kg)

LD - Safe Live Load Under 2000 lbs. (900kg) The above categories are given as a guide only. Please consult factory.

Job Name	Contractor
Job Location	Contractor's P.O. No.
Engineer	Representative

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



**Specification Drainage Products** 

**USA:** Tel: (828) 288-2179 • TOLL-FREE: 1-800-338-2581 • www.watts.com

ES-WD-FD-670 USA 1420 FD-670