




LF15M2-DR Series
 Tag: _____

Water Hammer Arrestor

SPECIFICATION: Watts Drainage LF15M2-DR Series lead free* pre-charged copper water hammer arrestor with polypropylene piston, EPDM o-ring seal, and brass NPT threaded connection.

OPERATING PRESSURE: Designed to operate on all domestic and commercial lines up to 150psi (10.6 bar) working pressure.

TEMPERATURE RANGE: 33°F to 180°F (0.5°C to 82°C).

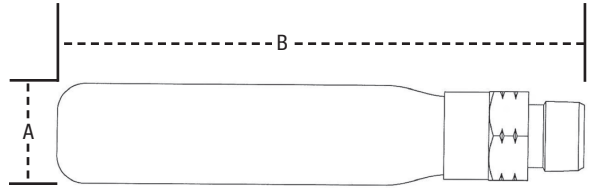

SIZE (DN)	CONNECTION	DIMENSIONS				PDI SIZE	FIXTURE UNITS
		A		B			
	Threaded	in.	mm	in.	mm		
LF15M2-A-DR	1/2"	1 1/8	28.5	5 15/16	150.9	A	1-11
LF15M2-B-DR	3/4"	1 3/8	34.9	8 9/16	218.0	B	12-32
LF15M2-C-DR	1"	1 5/8	41.3	8 13/16	223.5	C	33-60
LF15M2-D-DR	1"	2 1/8	54.0	9 15/16	252.5	D	61-113
LF15M2-E-DR	1"	2 1/8	54.0	12 11/16	322.5	E	114-154
LF15M2-F-DR	1"	2 5/8	66.7	11 5/32	283.5	F	155-330

Standards



Certified to NSF/ANSI 372

Standard: Listed by IAPMO, ASSE 1010 approved, ANSI A112.26.1M approved, PDI WH201 approved and certified.

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

Job Name _____ Contractor _____

Job Location _____ Contractor's P.O. No. _____

Engineer _____ Representative _____

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



Specification Drainage Products

USA: Tel: (828) 288-2179 • TOLL-FREE: 1-800-338-2581 • www.watts.com
Canada: (905) 332-4090 • Fax: (905) 332-7068 • www.watts.ca