




LFTP300-DR


Trap Primer & Distribution Unit

Tag: _____

SPECIFICATION: Watts Drainage LFTP300-DR pressure drop activated lead*brass trap primer with EPDM seals, integral air gap, and 1/2" sweat or NPT threaded connections. Operating pressure 25 psi - 125 psi. Tested and approved in conformance with ASSE Standard 1018. Specify Model LFTP300-DU-DR for Distribution Unit.

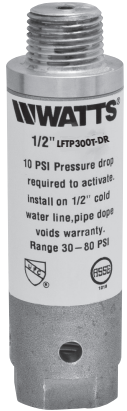

Model LFTP300T-DR

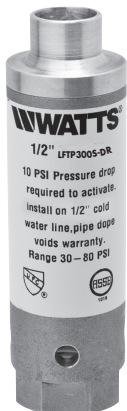

Model LFTP300S-DR



Model LFTP300-DU-DR

Flow Chart

INLET PRESSURE	25	50	75	100	125
*GPM	1.1	1.6	2.0	2.3	2.4
*LPM	4.2	6.1	7.6	8.7	9.1




NOTICE

*Minimum cold flow required for proper trap priming.

Model LFTP300T



Model LFTP300S

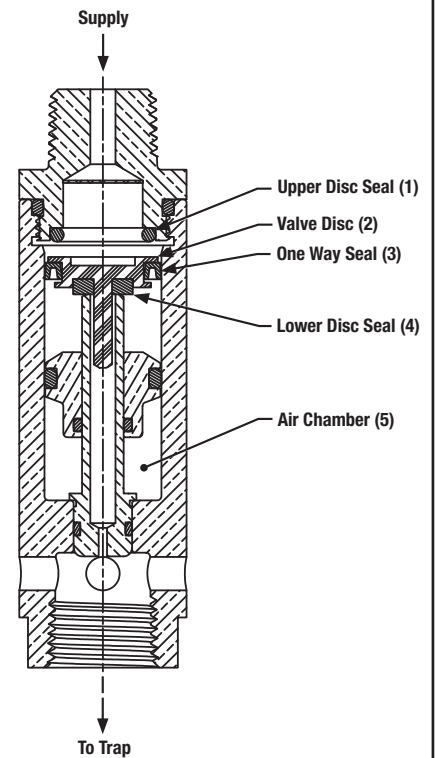

MODEL	SIZE (DN)		DIMENSIONS			
			A		B	
	in.	mm	in.	mm	in.	mm
LFTP300T-DR	1/2 Threaded	15	4 5/16	110	1 1/4	32
LFTP300S-DR	1/2 Sweat	15	4 1/4	107	1 1/4	32
LFTP300-DU-DR	1/2	15	3 1/8	79	2 13/16	71

* The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

Job Name _____

Contractor _____

Job Location _____

Contractor's P.O. No. _____

Engineer _____

Representative _____

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

USA: Tel: (800) 338-2581 • Fax: (828) 248-3929 • Watts.com

Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca

Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com

ES-WD-LFTP300-DR-USA 1519



A Watts Water Technologies Company