




SA Series

Heavy Duty Sand and Sediment Interceptor

Tag: _____

SPECIFICATION: Watts Drainage SA Series heavy duty epoxy coated steel sand and sediment interceptor with gasketed epoxy coated steel skid-proof cover secured with hex head center bolt(s), internal straining baffles, 2"(51) no hub vents, and 4"(102) no hub (standard) connections.

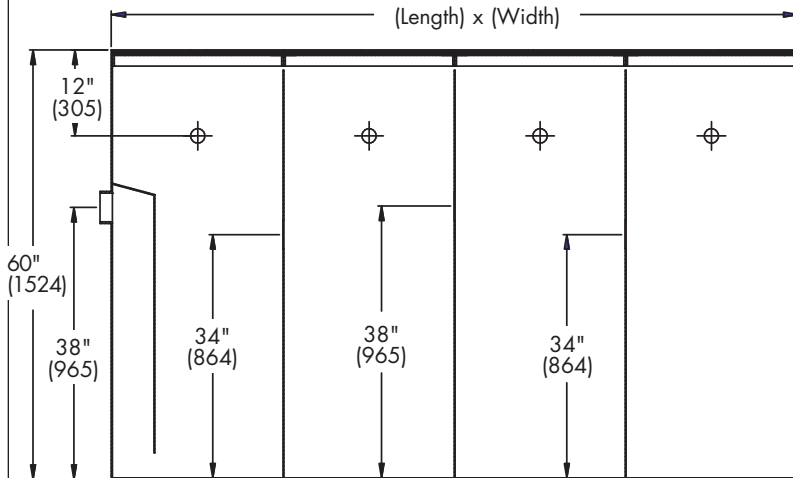

Flow Rate (Select One)		
Suffix	Description	
310	300 GPM	<input type="checkbox"/>
410	400 GPM	<input type="checkbox"/>
510	500 GPM	<input type="checkbox"/>
610	600 GPM	<input type="checkbox"/>
710	700 GPM	<input type="checkbox"/>
810	800 GPM	<input type="checkbox"/>
1010	1000 GPM	<input type="checkbox"/>

Options (Select One)		
Suffix	Description	
-DI	Dual Inlet	<input type="checkbox"/>
-HD	Heavy Duty (10,000 lb.) Traffic Cover*	<input type="checkbox"/>
-FC	Flange w/Mem. Clamp	<input type="checkbox"/>
-O	Inlet & Outlet other than Standard	<input type="checkbox"/>
-SS	Stainless Steel	<input type="checkbox"/>
-THD	Threaded Connections	<input type="checkbox"/>

* HD Option Requires Minimum 4" Extension

Size	Approx. Weight	Cu. Ft.	Length	Width	Height
SA-310	1600 Lbs.	43	60"(1524)	36"(914)	60"(1524)
SA-410	1750 Lbs.	54	72"(1829)	36"(914)	60"(1524)
SA-510	2100 Lbs.	72	96"(2438)	36"(914)	60"(1524)
SA-610	2500 Lbs.	81	108"(2743)	36"(914)	60"(1524)
SA-710	2700 Lbs.	90	120"(3048)	36"(914)	60"(1524)
SA-810	3000 Lbs.	108	144"(3658)	36"(914)	60"(1524)
SA-1010	3640 Lbs.	135	180"(4572)	36"(914)	60"(1524)

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Job Name _____

Contractor _____

Job Location _____

Contractor's P.O. No. _____

Engineer _____

Representative _____

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: Tel: (800) 338-2581 • Fax: (828) 248-3929 • Watts.com
Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca
Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com