




SI-770

Solids Interceptor


Tag: _____

SPECIFICATION: Watts Drainage SI-770 recessed or floor mounted epoxy coated steel solids interceptor with gasketed epoxy coated steel skid-proof cover secured with hex head center bolt(s), removable sediment basket, and no hub connection.

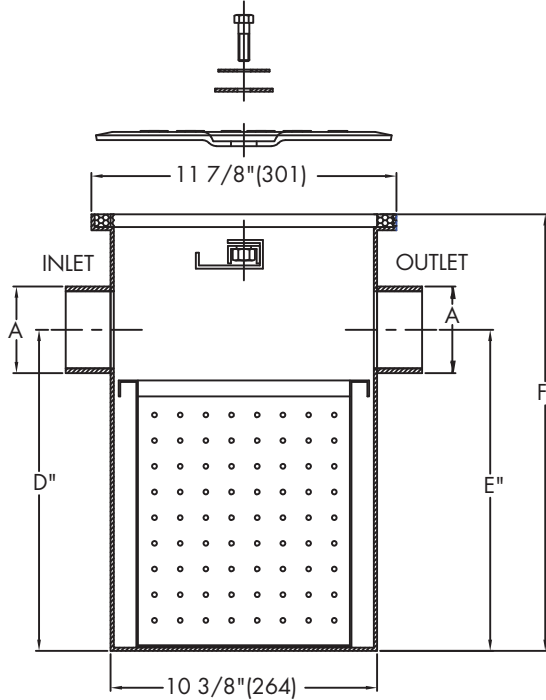

Size	Flow Rate Description	
100	4 GPM	<input type="checkbox"/>
200	7 GPM	<input type="checkbox"/>
300	10 GPM	<input type="checkbox"/>
400	15 GPM	<input type="checkbox"/>
500	20 GPM	<input type="checkbox"/>
600	25 GPM	<input type="checkbox"/>
700	35 GPM	<input type="checkbox"/>
800	50 GPM	<input type="checkbox"/>
900	75 GPM	<input type="checkbox"/>
1000	100 GPM	<input type="checkbox"/>

Suffix	Options Description	
-X	Extension	<input type="checkbox"/>
-O	Inlet & Outlet (other than standard)	<input type="checkbox"/>
-SS	Stainless Steel	<input type="checkbox"/>
-THD	Threaded Connections	<input type="checkbox"/>

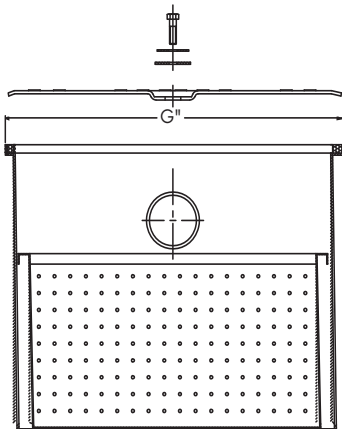

Size	"A" Inlet/Outlet Size	Flow Rate G.P.M.(L)	Solids Cap Cubic Ft. (m ³)	Dimensions in Inches		
				"F"	"G"	"D/E"
100	2 (51)	4 (15)	0.20 (.006)	10 (254)	11-3/4 (298)	7-1/4 (184)
200	2 (51)	7 (26)	0.29 (.008)	11-1/8 (283)	13-3/4 (349)	8-1/8 (206)
300	2 (51)	10 (38)	0.33 (.009)	11-3/4 (298)	15-7/8 (403)	8-1/4 (210)
400	3 (76)	15 (57)	0.38 (.011)	13-3/8 (340)	18-5/8 (473)	9-3/8 (238)
500	3 (76)	20 (76)	0.66 (.019)	15 (381)	19-1/8 (488)	11-3/4 (298)
600	3 (76)	25 (95)	0.79 (.022)	17 (432)	21-3/4 (552)	12-1/2 (318)
700	3 (76)	35 (132)	1.17 (.033)	18-3/4 (476)	24-3/8 (619)	14-1/4 (362)
800	4 (102)	50 (189)	1.35 (.038)	21-1/8 (546)	24-3/8 (619)	16 (406)
900	4 (102)	75 (284)	1.61 (.046)	22-3/4 (578)	24-3/8 (619)	18-1/2 (470)
1000	4 (102)	100 (379)	1.80 (.051)	27 (686)	24-3/8 (619)	23 (584)

Job Name _____

Contractor _____

Job Location _____

Contractor's P.O. No. _____

Engineer _____

Representative _____

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

USA: Tel: (800) 338-2581 • Fax: (828) 248-3929 • Watts.com
Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca
Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com



A Watts Water Technologies Company