



SS Series


Tag: _____

Stainless Steel Shock Arrestors

SPECIFICATION: Watts Drainage SS Series pre-charged all stainless steel shock arrestor with stainless steel bellows, and male IPS threaded connection.

OPERATING PRESSURE: Designed to operate on all domestic and commercial lines up to 150psi working pressure, 250psi static pressure.

TEMPERATURE RANGE: -100°F to 300°F (-73°C to 149°C)

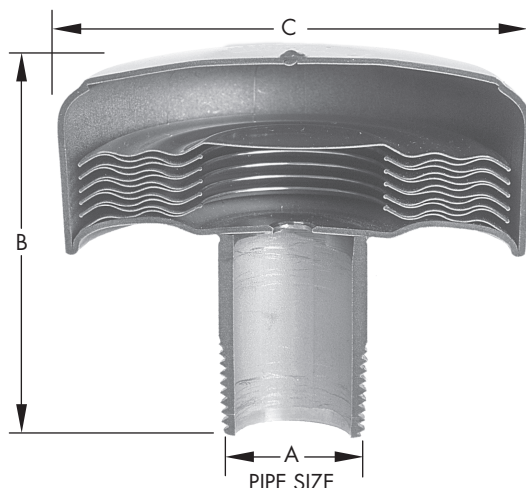

Pipe Sizing (Select One)		
Suffix	Description	
A	3/4"(19) Connection	<input type="checkbox"/>
B	1"(25) Connection	<input type="checkbox"/>
C	1"(25) Connection	<input type="checkbox"/>
D	1"(25) Connection	<input type="checkbox"/>
E	1"(25) Connection	<input type="checkbox"/>
F	1"(25) Connection	<input type="checkbox"/>

Option		
Suffix	Description	
-US	Buy American Compliant	<input type="checkbox"/>



Note: Complies with PDI WH201



Note: Complies with ASSE 1010

	TECHNICAL DATA					
	SS-A	SS-B	SS-C	SS-D	SS-E	SS-F
Fixture Unit	1-11	12-32	33-60	61-113	114-154	155-330
"A" connection	3/4" (19)	1"(25)	1"(25)	1"(25)	1"(25)	1"(25)
"B" height	3-3/16"(81)	4"(102)	4-5/16"(110)	5-1/4"(133)	7"(178)	7"(178)
"C" diameter	3-1/4"(83)	3-1/4"(83)	3-1/4"(83)	3-1/4"(83)	3-1/4"(83)	3-1/4"(83)

Job Name _____ Contractor _____

Job Location _____ Contractor's P.O. No. _____

Engineer _____ Representative _____

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



Specification Drainage Products

USA: 100 Watts Road, Spindale, NC, 28160-2298; TEL: 828-288-2179 TOLL-FREE: 1-800-338-2581

watts.com