




WD-H Series

Tag: _____

Grease Interceptor with Access Housing

SPECIFICATION: Watts Drainage WD-H Series recessed epoxy coated steel grease interceptor with gasketed epoxy coated steel cover, hex head perimeter bolts, removable grease accumulating cover and baffle assembly, deep seal trap with cleanout, internal stainless steel flow control plate, IPS threaded connections, and epoxy coated steel access housing with skid-proof cover and adjustable carrier brackets.

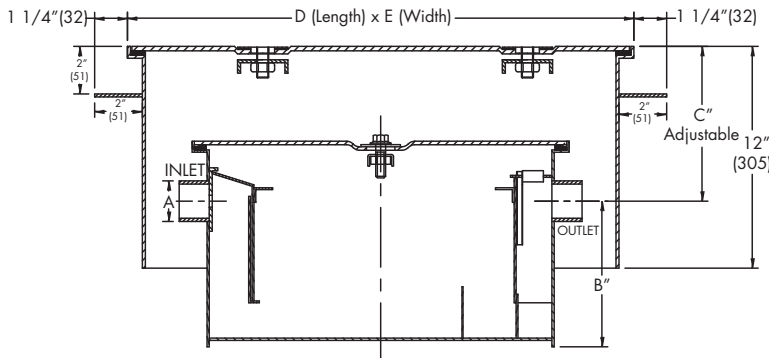

Suffix	Options (Select One or More) Description	
7	7 GPM	<input type="checkbox"/>
10	10 GPM	<input type="checkbox"/>
15	15 GPM	<input type="checkbox"/>
20	20 GPM	<input type="checkbox"/>
25	25 GPM	<input type="checkbox"/>
35	35 GPM	<input type="checkbox"/>
50	50 GPM	<input type="checkbox"/>
75	75 GPM	<input type="checkbox"/>

Suffix	Options (Select One or More) Description	
-B	Sediment Bucket	<input type="checkbox"/>
-FC	Flange & Clamp Device	<input type="checkbox"/>
-O	Inlet & Outlet other than Standard Size	<input type="checkbox"/>
SS	Stainless Steel	<input type="checkbox"/>

Interceptor Catalog Number	Flow Rate GPM	Grease Capacity lbs.	A Inlet & Outlet	B Interceptor Base to Center	C Top to Center Min Max.	D Length	E Width
WD-7-H	7	14	2"	8-1/2"	5-1/4" 13-1/4"	35"	18-1/2"
WD-10-H	10	20	2"	8-1/2"	5-1/4" 13-1/4"	39"	19-1/2"
WD-15-H	15	30	2"	10-1/2"	5-1/4" 13-1/4"	39"	20-1/2"
WD-20-H	20	40	3"	11-1/2"	5-1/4" 13-1/4"	41"	21-1/2"
WD-25-H	25	50	3"	12"	6-1/4" 14-1/4"	43"	22"
WD-35-H	35	70	3"	14"	6-3/4" 14-3/4"	47"	23-1/2"
WD-50-H	50	100	4"	16"	7-1/4" 15-1/4"	49"	27-1/2"
WD-75-H	75	150	4"	18-1/2"	7-3/4" 15-3/4"	53"	28-3/4"

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation and product safety information before beginning the installation of this product.

Job Name _____

Contractor _____

Job Location _____

Contractor's P.O. No. _____

Engineer _____

Representative _____

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



A Watts Water Technologies Company

USA: Tel: (800) 338-2581 • Fax: (828) 248-3929 • Watts.com

Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca

Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com