

For Residential and Commercial Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

Watts Model WHT115

High Temperature Shutoff Device

Added Safety, Easy to Install and High Temperature Protection

Watts' new high temperature shutoff device is designed to provide thermostatic protection for the shower. If the temperature during the shower reaches $115^{\circ}\text{F} \pm 3^{\circ}\text{F}$ (46°C) this device instantly reduces the flow to less than 0.25 gpm (from 2.5 gpm). Once the temperature drops below 115°F (46°C), the WHT115 automatically resets and resumes full flow within seconds. It is ideal for use with two handle, single handle, pressure balance and temperature control valves. It is easy to install and can be used for new or existing applications.

Features

- Factory set at 115°F (46°C) shutoff limit for safety
- New ATA (Advanced Thermal Actuation) technology improves performance
- Solid brass construction enhances durability
- Maximum flow rate 4.0 gpm (15.2 l/min)
- Easy to Install

Superior design ensures long-term reliability and it is ideal for:

- Hospitals
- Hotels/Motels
- Private Residences
- Healthcare
- Schools
- Anywhere shower safety is a concern

Materials

Finish: Polished Chrome

Housing Material: Brass

Approvals

Certification: CSA

Listing: ASSE 1062



Flow — Temperature



Maximum Flow: 4.0 gpm (15.2 l/min)

Temperature Activation: 115°F (46°C) $\pm 3^{\circ}\text{F}$ (1.6°C)



WHT115



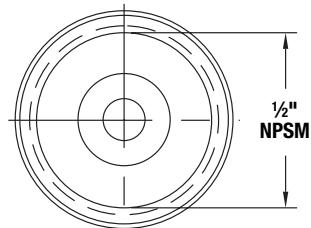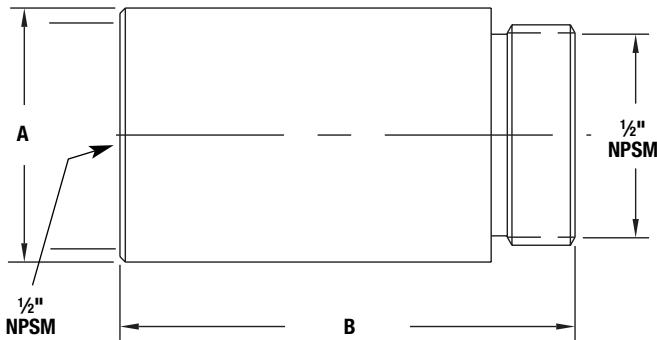

Dimensions — Weights

SIZE		DIMENSIONS		WEIGHTS	
in.	mm	in.	mm	lbs.	kgs.
1/2	13	15/16	24	0.25	0.11

Note:

Dimensions are shown $\pm 1/2"$

Dimensions in parentheses are in mm

WATTS®

Water Safety & Flow Control Products

ES-WHT115 0815

**ISO 9001-2000
CERTIFIED**

USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.watts.com
Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscanada.ca

© Watts, 2008