


FD-100-VS

Tag:

Floor Drain with Square Hinged Solid Cover

SPECIFICATION: Watts Drainage FD-100-VS epoxy coated cast iron floor drain with anchor flange, reversible clamping collar with primary & secondary weepholes, adjustable square solid hinged nickel bronze strainer, and no hub (standard) outlet.

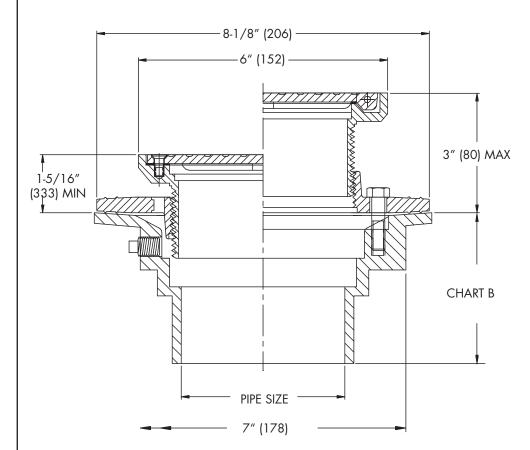

Load Rating

Suffix Load Rating		Free Area Sq. In.	
VS	*HD	NOT APPLICABLE	

* The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows:

ASME Ratings are as follows: XHD - Safe Live Load 7500-10000 lbs.(3375-4500kg) The above categories are given as a guide only. Please consult factory.

Components B3-XYC

Pipe Sizing (Select One) Suffix Description			
2	2"(51) Pipe Size		
3	3"(76) Pipe Size		
4	4"(102) Pipe Size		
6	6"(152) No Hub Only	$\bar{\Box}$	

Suffix	Outlet Type (Select One) Description	
NH	No Hub (M)	10
Р	Push On	
Т	Threaded Outlet	
Х	Inside Caulk	

Options (Select One or More)			
Suffix	Description		
-5	Sediment Bucket		
-6	Vandal Proof		
-7	Trap Primer Tapping		
-8	Backwater Valve (2", 3", 4" Only)		
-13	Galvanized Body		
-15	Strainer Extension (DD-50)		
-SO	Side Outlet		
-US	Buy American Compliant		

Optional Body Material		
Suffix	Description	
-60 -61	PVC Body w/Socket Outlet ABS Body w/Socket Outlet	

Chart B

	Std.	Р	T	Х	60/61
Pipe Size	No Hub	Push On	Female Thread	Inside Caulk	PVC/ ABS
2"(51) 3"(76) 4"(102) 6"(152)	3-5/8"(92) 3-5/8"(92) 3-5/8"(92) 3-1/2"(89)	4-1/4"(108)	4-1/4"(108) 4-1/4"(108) 4-1/4"(108)	4-1/2"(114)	

Job Name	Contractor
Job Location	Contractor's P.O. No
Engineer	Representative

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



USA: 100 Watts Road, Spindale, NC, 28160-2298; TEL: 828-288-2179 TOLL-FREE: 1-800-338-2581 www.watts.com

ES-WD-FD-100-VS USA 1304 FD-100-VS